


Neoprene Mounts

Loadings	Design Deflection				
	3mm	4mm	5mm	9mm	10mm
2.5 - 5 Kg	✓				
4 - 8 Kg	✓				
7 - 14 Kg	✓				
9 - 18 Kg	✓	✓		✓	
14 - 28 Kg		✓		✓	
18 - 60Kg			✓		✓
20 - 40 Kg		✓		✓	
27 - 54 Kg		✓		✓	
36 - 72 Kg		✓		✓	
54 - 108 Kg			✓		✓
90 - 180 Kg			✓		✓
135 - 270 Kg			✓		✓
180 - 360 Kg			✓		✓

Thread Size	3mm	4mm	5mm	9mm	10mm
m8	✓	✓		✓	
m12			✓		✓

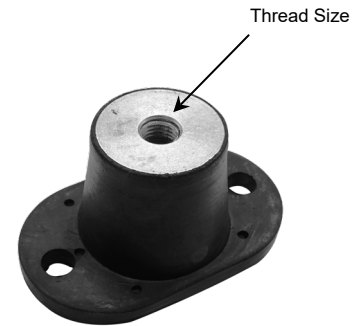


The neoprene mounts is suitable for isolating vibration from packaged units e.g. Pressurisation Units or Expansion Vessels.

The neoprene rubber used is highly resistant to ageing and weathering.

Hanger Box c/w Neoprene Mount

Loadings	Design Deflection				
	3mm	4mm	5mm	9mm	10mm
2.5 - 5 Kg	✓				
4 - 8 Kg	✓				
7 - 14 Kg	✓				
9 - 18 Kg	✓	✓		✓	
14 - 28 Kg		✓		✓	
18 - 60Kg			✓		✓
20 - 40 Kg		✓		✓	
27 - 54 Kg		✓		✓	
36 - 72 Kg		✓		✓	
54 - 108 Kg			✓		✓
90 - 180 Kg			✓		✓
135 - 270 Kg			✓		✓
180 - 360 Kg			✓		✓

Hole Dia	3mm	4mm	5mm	9mm	10mm
12mm	✓	✓		✓	
14mm			✓		✓

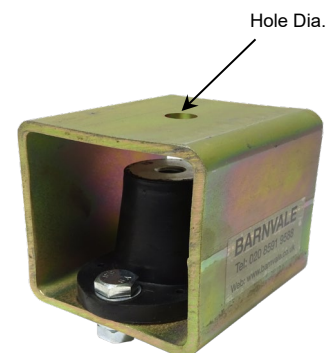

Boxes are electrophoretic coated to 18 microns thick to give maximum corrosion resistance, however, are available galvanized if required at extra cost.