

Nominal Pipe Size		O/D Range	Boss Size	SWL
Imperial	Metric			
3/8		15 - 20	m8 / m10	1,300 N
1/2	15mm	19 - 23	m8 / m10	1,300 N
		23 - 28	m8 / m10	1,300 N
3/4	20mm	26 - 30	m8 / m10	1,300 N
1	25mm	32 - 35	m8 / m10	1,300 N
1 1/4	32mm	39 - 43	m8 / m10	1,300 N
1 1/2	40mm	45 - 51	m8 / m10	1,600 N
		53 - 61	m8 / m10	1,600 N
2	50mm	62 - 67	m8 / m10	1,600 N
		68 - 74	m8 / m10	1,600 N
2 1/2	65	75 - 81	m8 / m10	2,000 N
3	80	83 - 93	m8 / m10	2,000 N
		93 - 103	m8 / m10	2,500 N
		103 - 113	m8 / m10	2,500 N
4	100	113 - 123	m8 / m10	2,500 N
		123 - 133	m8 / m10	3,000 N
5	125	133 - 143	m8 / m10	3,000 N
		143 - 153	m8 / m10	3,200 N
		154 - 162	m8 / m10	3,200 N
6	150	163 - 172	m8 / m10	3,200 N
		173 - 183	m8 / m10	3,200 N
7	175	184 - 194	m8 / m10	3,200 N
		195 - 205	m8 / m10	3,200 N
		206 - 216	m8 / m10	3,200 N
8	200	217 - 225	m8 / m10	3,200 N
		220 - 230	m8 / m10	3,200 N

Standard Finish Zinc Plated




Heavy Duty Clamp For In & Outdoor Use

B020/H

Nominal Pipe Size		O/D Range	Boss Size	SWL
Imperial	Metric			
1/2	15	19 - 23	m8 / m10	1,000 N
3/4	20	25 - 30	m8 / m10	1,000 N
1	25	31 - 36	m8 / m10	1,000 N
		37 - 42	m8 / m10	1,000 N
1 1/4	32	40 - 45	m8 / m10	1,000 N
1 1/2	40	47 - 52	m8 / m10	1,000 N
		53 - 58	m8 / m10	1,000 N
2	50	59 - 65	m8 / m10	1,000 N
		66 - 71	m8 / m10	1,000 N
2 1/2	65	72 - 78	m10 / m12	2,000 N
		79 - 85	m10 / m12	2,000 N
3	80	86 - 92	m10 / m12	2,000 N
		98 - 106	m10 / m12	2,500 N
4	100	118 - 116	m10 / m12	2,500 N
		116 - 123	m10 / m12	3,000 N
		125 - 133	m10 / m12	3,000 N
5	125	132 - 140	m10 / m12	3,200 N
		148 - 154	m10 / m12	3,200 N
6	150	159 - 169	m10 / m12	3,200 N
		173 - 183	m10 / m12	3,200 N
		192 - 202	m10 / m12	3,200 N
		208 - 219	m10 / m12	3,200 N
8	200	217 - 227	m10 / m12	3,200 N

Standard Finish Suitable For In & Outdoor Applications

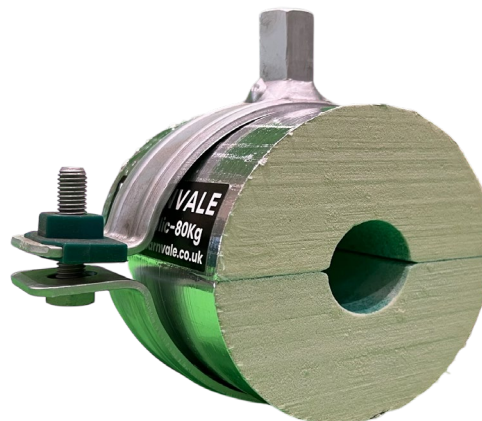

Nominal Pipe Size			Tube Range	Boss Size	SWL
Imperial	Metric	Copper			
		15	12 - 20	m8 / m10	1,000 N
1/2	15	22	21 - 26	m8 / m10	1,000 N
3/4	20	28	26 - 30	m8 / m10	1,000 N
1	25	35	33 - 37	m8 / m10	1,000 N
1 1/4	32	42	40 - 46	m8 / m10	1,000 N
1 1/2	40		48 - 53	m8 / m10	1,300 N
		54	53 - 59	m8 / m10	1,300 N
2	50		60 - 66	m8 / m10	1,300 N
		67	67 - 77	m8 / m10	1,300 N
2 1/2	65	76	75 - 84	m8 / m10	1,300 N
3	80		83 - 93	m8 / m10	1,300 N
			94 - 104	m8 / m10	1,300 N
		108	102 - 111	m8 / m10	1,300 N
4	100		109 - 119	m8 / m10	2,200 N
		133	128 - 139	m8 / m10	2,200 N
5	125		135 - 148	m8 / m10	2,200 N
		159	151 - 164	m8 / m10	2,200 N
6	150		158 - 170	m8 / m10	2,200 N
8	200		215 - 225	m8 / m10	2,500 N

EPDM-SBR Rubber (Temp -50 to 110°C)

Standard Finish Zinc Plated



Heavy Duty Lined Clamp For Outdoor Use

B021/L

Nominal Pipe Size			Range	Boss Size	SWL
Imperial	Metric	Copper			
		15	15 - 19	m8 / m10	1,500 N
1/2	15	22	19 - 23	m8 / m10	1,500 N
3/4	20	28	25 - 29	m8 / m10	1,500 N
1	25	35	30 - 35	m8 / m10	1,500 N
1 1/4	32	42	40 - 45	m8 / m10	1,500 N
1 1/2	40		46 - 51	m8 / m10	1,500 N
		54	53 - 59	m8 / m10	1,500 N
2	50		59 - 64	m8 / m10	1,500 N
		67	65 - 71	m10 / m12	1,500 N
2 1/2	65	76	72 - 78	m10 / m12	2,300 N
			79 - 85	m10 / m12	2,300 N
3	80		86 - 92	m10 / m12	2,300 N
		108	101 - 109	m10 / m12	2,300 N
4	100		108 - 116	m10 / m12	2,300 N
		133	125 - 133	m10 / m12	2,300 N
5	125		132 - 140	m10 / m12	2,300 N
6	150	159	159 - 169	m10 / m12	3,800 N
			178 - 188	m10 / m12	3,800 N
			194 - 204	m10 / m12	3,800 N
			203 - 213	m10 / m12	3,800 N
8	200		217 - 227	m10 / m12	3,800 N

Sound Insulating Lining According DIN To 4109

Standard Finish Suitable For In & Outdoor Applications

